
BISON TRAIL ENGINEERED HARDWOOD





Step into the rustic allure of the Bison Trail collection. Crafted with a passion for strength and beauty, each $7 \frac{1}{2}$ " wide plank embodies the robust essence of oak, unified by an engineered multi-layer plywood core for unwavering stability. This collection invites you to forge a path of timeless elegance and enduring quality in your home.



BISON TRAIL ENGINEERED HARDWOOD



PRODUCT SPECIFICATIONS

| Species | Oak Maple or Hickory |
|-----------------------------|--|
| Structure | Engineered multilayer plywood core |
| Surface Layer | 2mm sliced wood face layer |
| Width | 7 ¹ / ₂ " |
| Thickness | 1/2" (12mm) |
| Length | Random Length |
| Edge Detail | Micro-beveled edges or scraped edges |
| Surface Texture | Wirebrushed or handcrafted distressed |
| Finish | UV Cured Polyurethane Finish with Aluminum Oxide or smoked |
| Gloss Level | Low or medium degree luster level |
| Variation Level | 4 - Intense |
| Installation | T&G Joint - Stapled, glued down or floated |
| Suitable Location | On, above or below grade |
| Certification | CARB II, Floorscore |
| Radiant Heat | Oak & Maple - suitable for use with hydronic systems. Hickory - not compatible |
| Warranty | Limited 35-year residential wear and limited lifetime structural |
| Price Range (\$ - \$\$\$\$) | \$\$ |

CARTON SPECS

| Packaging | 25.77 - 31.09 sq./ft. per carton |
|-----------|----------------------------------|
| Weight | 45 - 52 lbs. |

FLOORING MOLDINGS & TRIM OPTIONS



CANYON CREEK ENGINEERED HARDWOOD





Enjoy the beauty of this Collection with its luxurious wide planks and on trend color palette, including fumed colors to offer depth and richness. Each plank showcases the true beauty and natuarl variation of hardwood. The strong wire brushing brings the feeling of being at the canyon right into your home.



CANYON CREEK ENGINEERED HARDWOOD



PRODUCT SPECIFICATIONS


| Species | European Oak |
|-----------------------------|---|
| Structure | Engineered multi-layer plywood core |
| Surface Layer | 4mm sawn wood face layer |
| Width | 9" |
| Thickness | 5/8" |
| Length | Random |
| Edge Detail | Micro-beveled edges |
| Surface Texture | Hard wire brushed & smoked, hard wire brushed & chemically stained, hard wire brushed |
| Gloss Level | Low degree luster level |
| Variation Level | 4 - Intense |
| Finish | UV Cured Polyurethane Finish with Aluminum Oxide |
| Installation | T&G joint - Stapled, glued down or floated |
| Suitable Location | On, above or below grade |
| Certification | CARB II, Floorscore |
| Radiant Heat | Suitable for use with hydronic systems |
| Warranty | Limited 35-year residential & lifetime structural |
| Price Range (\$ - \$\$\$\$) | \$\$ |
| CARTON SPECS | |
| Packaging | 23.5 sq./ft. per carton |
| Weight | 54.01 lbs. |



visit FuzionFlooring.com

CAPE BAY ENGINEERED HARDWOOD



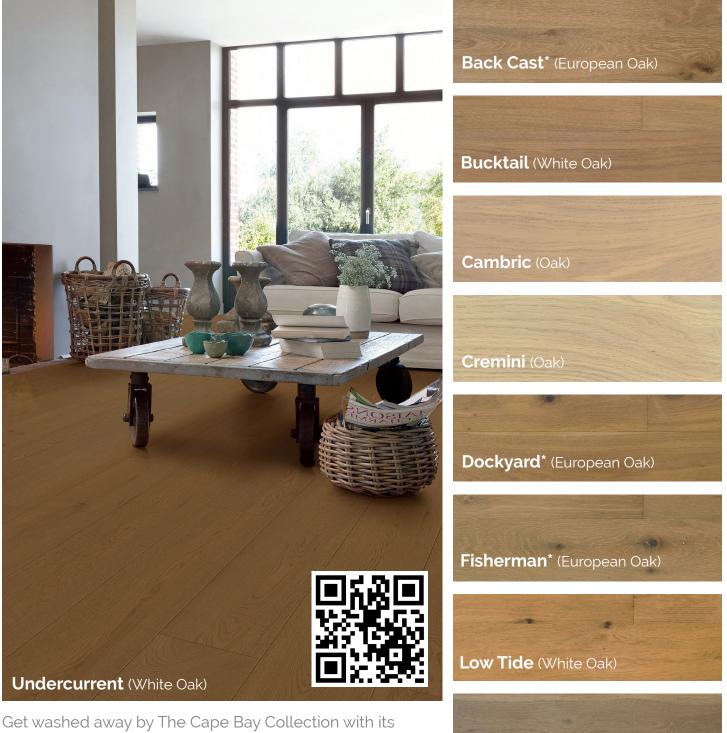

Get washed away by The Cape Bay Collection with its striking wide planks and on trend color palette, including some smoked colors to offer depth and richness. Each piece expresses a soft, low-luster finish, wirebrushing that's sure to bring the feeling of being at the bay right to your home.





CAPE BAY ENGINEERED HARDWOOD



PRODUCT SPECIFICATIONS

| Species | Oak |
|-----------------------------|---|
| Structure | Engineered multi-layer plywood core |
| Surface Layer | Sliced wood face layer |
| Width | 6 ¹ / ₂ " |
| Thickness | 3/8" |
| Length | Random |
| Edge Detail | Micro-beveled edges |
| Surface Texture | Wirebrushed or wirebrushed smoked (*) |
| Gloss Level | Low degree luster level |
| Variation Level | 4 - Intense |
| Finish | UV Cured Polyurethane Finish with Aluminum Oxide |
| Installation | T&G joint - Stapled, glued down or floated |
| Suitable Location | On, above or below grade |
| Certification | CARB II, Floorscore |
| Radiant Heat | Suitable for use with hydronic systems |
| Warranty | Limited 35-year residential & lifetime structural |
| Price Range (\$ - \$\$\$\$) | \$\$ |
| | |

CARTON SPECS

Packaging33.95 sq./ft. per cartonWeight45.42 lbs.

FLOOR MOULDINGS & TRIM OPTIONS:



COASTLINE ENGINEERED HARDWOOD











Three Sails (European Oak)

Get swept away by The Coastline Collection with its charming, yet unpredictable lengths, striking wide planks and captivating colour palette. Each piece expresses a soft, low-luster finish, subtle rustic saw marks and light wire brushing that's sure to bring the breathtaking visuals of the seaside right to your home.

COASTLINE ENGINEERED HARDWOOD



PRODUCT SPECIFICATIONS

| Species | European Oak |
|-----------------------------|--|
| Structure | Engineered multi-layer plywood core |
| Surface Layer | Sliced wood face layer |
| Width | 7-1/2" |
| Thickness | 1/2" |
| Length | Random |
| Edge Detail | Micro-beveled edges |
| Surface Texture | Wirebrushed |
| Gloss Level | Low degree luster level |
| Variation Level | 3- Strong |
| Finish | UV Cured Polyurethane Finish with Aluminum Oxide |
| Installation | T&G joint - Nailed, stapled, glued down or floated |
| Suitable Location | On, above or below grade |
| Certification | CARB II, Floorscore |
| Radiant Heat | Suitable for use with hydronic systems |
| Warranty | Limited 35-year residential & lifetime structural |
| Price Range (\$ - \$\$\$\$) | \$\$ |

CARTON SPECS

Packaging Weight 31.09 sq./ft. per carton

52 lbs.

FLOOR MOULDINGS & TRIM OPTIONS:



FRONTIER ENGINEERED HARDWOOD











Grace your living space with rich hardwood planks reminiscent of the good old days. Available in twelve colours, your home will surely suggest tradition and authenticity. Nothing captures that slice of Americana quite like the Frontier Collection.



FRONTIER ENGINEERED HARDWOOD



PRODUCT SPECIFICATIONS

| Species | Hickory, Maple |
|-----------------------------|--|
| Structure | Engineered multi-layer plywood core |
| Surface Layer | Sliced wood face layer |
| Width | 7-1/2" |
| Thickness | 3/8" |
| Length | Random |
| Edge Detail | Micro-beveled edges |
| Surface Texture | Wirebrushed |
| Gloss Level | Low degree luster level |
| Variation Level | 4 - Intense |
| Finish | UV Cured Polyurethane Finish with Aluminum Oxide |
| Installation | T&G joint - Nailed, stapled, glued down or floated |
| Suitable Location | On, above or below grade |
| Certification | CARB II, Floorscore |
| Radiant Heat | Not Compatible |
| Warranty | Limited 35-year residential & lifetime structural |
| Price Range (\$ - \$\$\$\$) | \$\$ |
| | |

CARTON SPECS

| Packaging | 20.99-31.09 sq./ft. per carton |
|-----------|--------------------------------|
| Weight | 25-41.5 lbs. |

FLOOR MOULDINGS & TRIM OPTIONS:



GRASSLANDS ENGINEERED WOOD





trend colors in all the Hickory collection.

Stirrup

GRASSLANDS ENGINEERED WOOD



PRODUCT SPECIFICATIONS

| Species | Hickory |
|-----------------------------|--|
| Structure | Engineered multi-layer plywood core |
| Surface Layer | Wood face layer, or sliced wood faced layer(*) |
| Width | 6 ¹ / ₂ " |
| Thickness | 3/8" |
| Length | Random |
| Edge Detail | Micro-beveled edges |
| Surface Texture | Handscraped, wirebrushed, chattered or wirebrushed only(*) |
| Gloss Level | Low degree luster level |
| Variation Level | 4 – Intense |
| Finish | UV Cured Polyurethane Finish with Aluminum Oxide |
| Installation | T&G joint - Stapled, glued down or floated |
| Suitable Location | On, above or below grade |
| Certification | CARB II, Floorscore |
| Radiant Heat | Not Compatible |
| Warranty | Limited 35-year residential & lifetime structural |
| Price Range (\$ - \$\$\$\$) | \$\$ |
| | |


CARTON SPECS

| Packaging | 32.2 or 33.95 sq./ft. per carton |
|-----------|----------------------------------|
| Weight | 43 or 45.5 lbs. |



HOMESTEAD ENGINEERED HARDWOOD



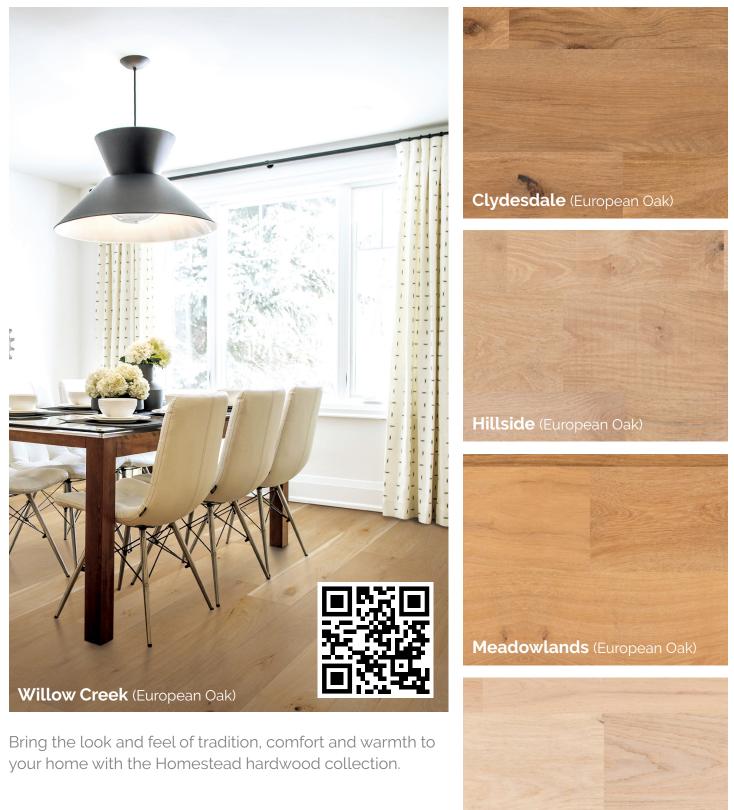

*For illustrative purposes only. Each product contains its own distinct character & colour variation. Speak to your retailer or Fuzion representative to ensure product satisfaction before purchase. Visit FuzionFlooring.com for more information on warranties, installation, care and maintenance.

Savanna (European Oak)

HOMESTEAD ENGINEERED HARDWOOD



PRODUCT SPECIFICATIONS

| Species | European Oak |
|-----------------------------|--|
| Structure | Engineered multi-layer plywood core |
| Surface Layer | 3mm dry sawn wood face layer |
| Width | 7-1/2" |
| Thickness | 9/16" |
| Length | Random |
| Edge Detail | Micro-beveled edges |
| Surface Texture | Light sawmark, brushed & light handscraping |
| Gloss Level | Low degree luster level |
| Variation Level | 4 - Intense |
| Finish | UV Cured Polyurethane Finish with Aluminum Oxide |
| Installation | T&G joint - Nailed, stapled, glued down or floated |
| Suitable Location | On, above or below grade |
| Certification | CARB II, Floorscore |
| Radiant Heat | Suitable for use with hydronic systems |
| Warranty | Limited 35-year residential & lifetime structural |
| Price Range (\$ - \$\$\$\$) | \$\$\$ |
| | |

CARTON SPECS


| Packaging | 27 sq./ft. per carton |
|-----------|-----------------------|
| Weight | 51.18 lbs. |

FLOOR MOULDINGS & TRIM OPTIONS:



OUTER BANKS CLIC (Canada) ENGINEERED HARDWOOD



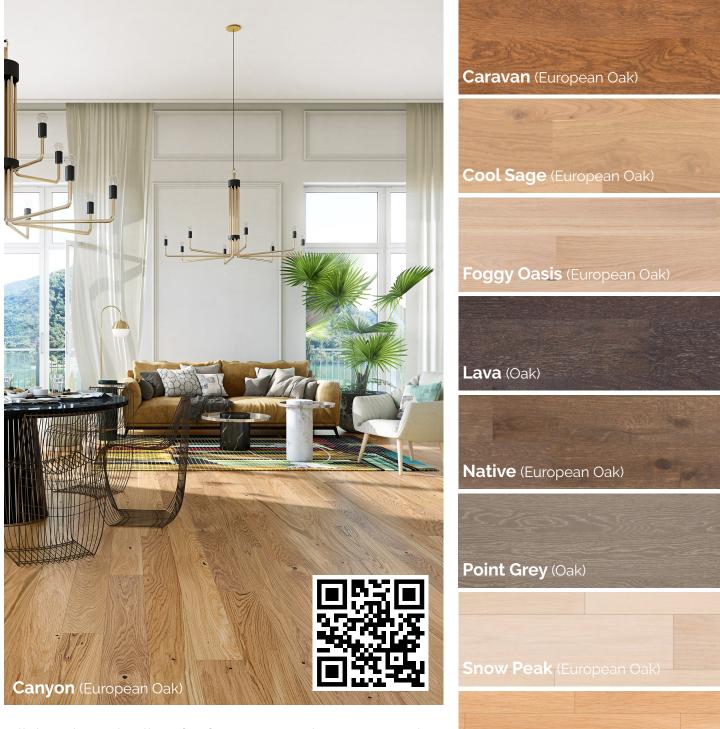

A light coloured pallet of soft greys, taupe's, creams, and naturals strongly influence this collection. The light wire brushed finish is on all colours and makes for an easy living, "casual chic" look and appeal for any room in the home.

*For illustrative purposes only. Each product contains its own distinct character & colour variation. Speak to your retailer or Fuzion representative to ensure product satisfaction before purchase. Visit FuzionFlooring.com for more information on warranties, installation, care and maintenance.

Soleste (European Oak)

Warm Pashmina (European Oak)

OUTER BANKS CLIC (Canada) ENGINEERED HARDWOOD



PRODUCT SPECIFICATIONS

| Species | European Oak, Oak |
|-----------------------------|---|
| Structure | Engineered 3-layer solidcore |
| Surface Layer | 2.5 MM Wood face layer / 3 MM Wood Face Layer |
| Width | 6", 5-7/8" |
| Thickness | 9/16" |
| Length | 70-7/8" |
| Edge Detail | 4-sided micro-beveled |
| Surface Texture | Light Wirebrushed |
| Gloss Level | Low degree luster level |
| Variation Level | 3 - Strong |
| Finish | UV Cured Polyurethane Finish with Aluminum Oxide |
| Installation | Click, Stapled, glued down or floated |
| Suitable Location | On, above or below grade |
| Certification | Floorscore |
| Radiant Heat | Suitable for use with hydronic systems |
| Warranty | Limited 35-year residential & lifetime structural |
| Price Range (\$ - \$\$\$\$) | \$\$\$ |
| CARTON SPECS | |

CARTON SPECS

| Packaging | 20.99-23.7 sq./ft. per carton |
|-----------|-------------------------------|
| Weight | 38-39 lbs. |

FLOOR MOULDINGS & TRIM OPTIONS:



SUMMIT RIDGE ENGINEERED HARDWOOD





Gaston (Oak)













With the Summit Ridge Collection creating a serene atmosphere, your home will mirror that same feeling of calmness. This collection is excellent for decorating your space to reflect an urban, modern and vibrant lifestyle.

SUMMIT RIDGE ENGINEERED HARDWOOD



PRODUCT SPECIFICATIONS

| Species | Oak, Hickory, Acacia |
|-----------------------------|---|
| Structure | Engineered multi-layer plywood core |
| Surface Layer | 1.2mm wood face layer |
| Width | 6-1/2" |
| Thickness | 1/2" |
| Length | Random |
| Edge Detail | Beveled edges |
| Surface Texture | Light wirebrushed (Oak & Hickory), Handscraped (Acacia) |
| Gloss Level | Low degree luster level |
| Variation Level | 3- Strong |
| Finish | UV Cured Polyurethane Finish with Aluminum Oxide |
| Installation | T&G joint - Nailed, stapled, glued down or floated |
| Suitable Location | On, above or below grade |
| Certification | CARB II & EPA, Floorscore |
| Radiant Heat | Suitable for use with hydronic systems (oak), Not compatible (Hickory & Acacia) |
| Warranty | Limited 35-year residential & lifetime structural |
| Price Range (\$ - \$\$\$\$) | \$\$ |
| | |

CARTON SPECS

| Packaging | 25.58 sq./ft. per carton |
|-----------|--------------------------|
| Weight | 43-51 lbs / 19.4 kgs. |

FLOOR MOULDINGS & TRIM OPTIONS:

